



# 37 Draw Latch

Flexible · Pull type · T-handle

- Flexible one piece molded latch

**Material and Finish**  
EPDM rubber and stainless steel

**Performance Details**


Average clamping force:  
49 N (11 lbf)

Operating temperature range:  
-20°C (0°F) to 95°C (200°F)

**Installation Notes**

Install assembly with four Ø 5(.188) rivets or M5 (No. 10) screws (not supplied)

Large

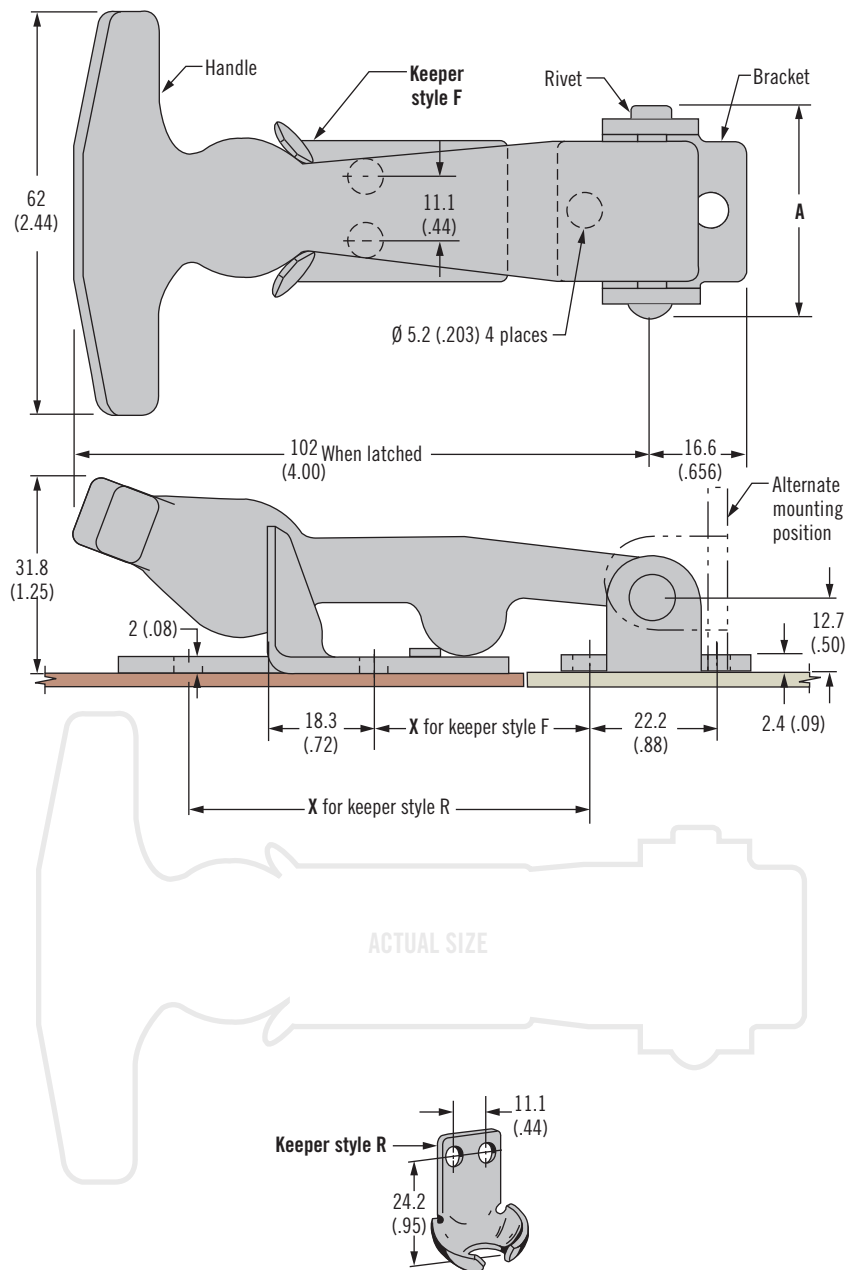

**Part Number**

See table

Assembly complete with keeper

| Part Number  |             |                         |              |                 |                           |              |
|--------------|-------------|-------------------------|--------------|-----------------|---------------------------|--------------|
| Keeper Style | X           | Latch shipped assembled |              |                 | Latch shipped unassembled |              |
|              |             | A                       | Steel        | Stainless Steel | A                         | Steel        |
| F            | 38.1 (1.50) | 31.8 (1.25)             | 37-10-086-10 | 37-10-086-20    | 34 (1.34)                 | 37-10-087-10 |
| R            | 73 (2.88)   |                         | 37-20-086-10 | 37-20-086-20    |                           | 37-20-087-10 |

Other options available. For complete details on variety, part numbers, installation and specification, go to

**INFO CLIC** [www.southco.com/37](http://www.southco.com/37)

Dimensions in millimeters (inch) unless otherwise stated