



MP Point Push-to-Close Latch

Pull-to-open

- Single, round-hole installation
- Flush pop out knob
- Corrosion-resistant materials
- Keeper sold separately

Material and Finish

Housing: Glass-filled nylon

Flange and knob: Zinc alloy, plated

Cam: Zinc alloy

Fixed keeper: Stainless steel

Hooded keeper: Nylon, black

Installation Notes

Maximum tightening torque on mounting nut: 4.5 N·m (40 in·lbf)

Fixed keeper: Use M5 or No. 10 screws to mount (not supplied)


Hooded keeper: Use M5 or No. 10 screws to mount (not supplied)

Accessories


Matching pulls available
see page 513

H Housing Style


Oval Perpendicular




Oval In-Line



Square



Round





ACTUAL SIZE

ACTUAL SIZE


ACTUAL SIZE

Installation


Latch Only (for keeper installation below)

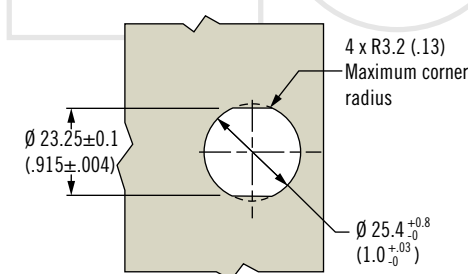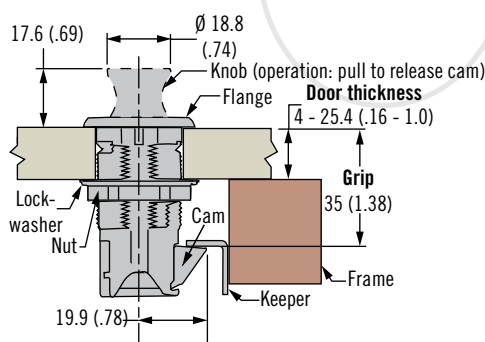

Fixed Keeper

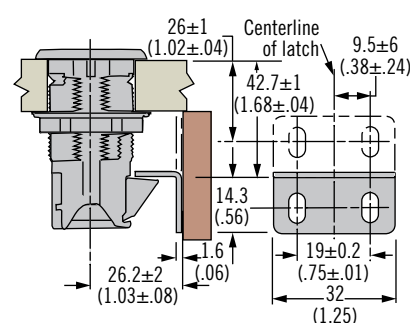

Hooded Keeper

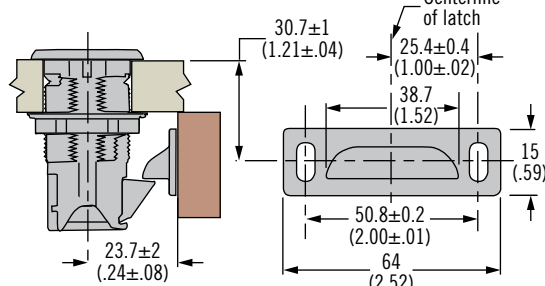

Fixed Keeper

M1-519-4

Hooded Keeper

MP-510-16-4

Part Number Selection

Latch only, keepers sold separately.

MP - 05 - H 2 - F K

F Flange finish

- | | |
|-------------------------|------------------------|
| 1 Chrome plated | 4 Diamond brass plated |
| 2 Satin chrome plated | 5 Black powder coated |
| 3 Brushed nickel plated | 6 Satin nickel plated |

H Housing style

- | | |
|-----------------------|-----------|
| 11 Oval perpendicular | 21 Square |
| 12 Oval in-line | 31 Round |

K Knob finish

- | | |
|-------------------------|------------------------|
| 1 Chrome plated | 4 Diamond brass plated |
| 2 Satin chrome plated | 5 Black powder coated |
| 3 Brushed nickel plated | 6 Satin nickel plated |

Other options available. For complete details on variety, part numbers, installation and specification, go to



www.southco.com/MP2

Dimensions in millimeters (inch) unless otherwise stated

southco
CONNECT · CREATE · INNOVATE